

Cooling unit 300 W
DTS 9011H

- service-friendly, compact design
- small mounting area, ideal for small electrical enclosures and larger electrical enclosures for the cooling of hot spots
- simple and fast mounting with brackets for door or side mounting
- powerful radial fans ensure optimum air circulation inside the enclosure
- integrated collective fault and door contact (potential-free)
- 100% reliability with controllers by Pfannenberg




Data		DTS 9011H	Unit
Article number	Standard Controller	13242541055	
Rated voltage ± 10%		AC 50 / 60	Hz
		230	V
Cooling performance according to EN 14511	L35/L35	300	W
	L35/L45	180	
Power consumption	L35/L35	275 / 290	A
Current consumption	L35/L35	1.52 / 1.56	
Starting current	L35/L35	4.52 / 4.66	
Unimpeded airflow (free flow)	internal	160	m³/h
	external	160	
Pre fuse T		16	A
Type of connection		spring-type terminal included with plug	
Noise level according to EN ISO 3741		< 65	dB (A)
Weight (without packaging)		15	kg
Ambient temperature range		+ 15 ... + 45 / + 59 ... + 113	°C / °F
Control range (adjustable)		+ 25 ... + 45 / + 77 ... + 113; factory setting + 35 / + 95	
Refrigerant	R134a	130	g
Duty cycle		100	%
Condensate management		condensate drain	
Protection system according to EN 60529	IP 54	towards the electrical enclosure if used as intended by the manufacturer	
	IP 34	towards the surroundings if used as intended by the manufacturer	
Design	housing	galvanised sheet steel	
	cover	galvanised/electrostatically powder coated (200 °C); stainless steel on request	
Colour (cover)		RAL 7035, different colours available on request	
Accessories	Piece	Article number	Information on page
External condensate evaporation system	1	18314000001	74
Condensate bottle	1	18314000100	74

Approvals see page 22. For additional information to ensure the accurate setting of the motor protection switch, please see technical specific data sheet. This information is included with the delivery of the unit or can be found at www.pfannenberg.com.

Cooling capacity performance curves

DTS 9011H

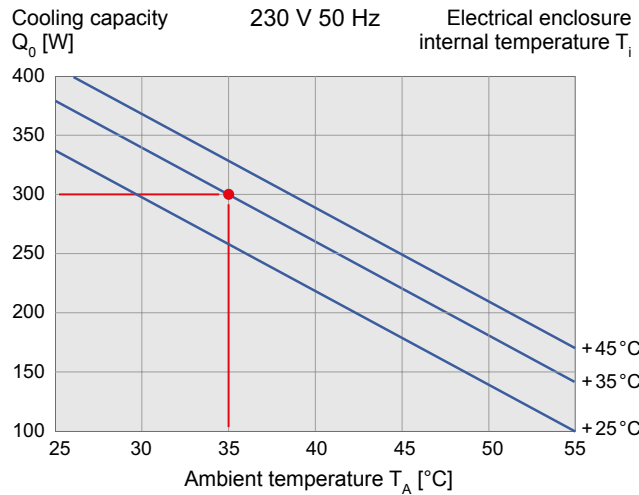

Dimensions

	X	Y	Z	K	L
mm	495	300	140	281	471

DTS 9011H

